

PVXC "VORTEX"

Fixed installation pumps

➡ for sewage water



PERFORMANCE RANGE

- Flow rate up to **1200 l/min** (72 m³/h)
- Head up to **16 m**

APPLICATION LIMITS

- **10 m** maximum immersion depth with a sufficiently long power cable
- Maximum liquid temperature **+40 °C**
- Solids passage:
 - up to **Ø 50 mm** for PVXC 15-20-30/50
 - up to **Ø 70 mm** for PVXC 15-20-30/70
- Minimum immersion depth for continuous service:
 - **390 mm** for PVXC 15-20-30/50
 - **440 mm** for PVXC 15-20-30/70

CONSTRUCTION AND SAFETY STANDARDS

- Standard features: base pedestal, threaded delivery counterflange, guide tube supports
- **10 m** long power cable
- Float switch for single-phase versions

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS



INSTALLATION AND USE

PVXC series pumps, made from heavy gauge cast iron offering exceptional sturdiness, abrasion resistance and durability, come equipped with a VORTEX impeller and are therefore suitable for draining **waste water, water mixed with mud, liquids containing air or gas**, as well as sludge. They are suitable for use in fixed sewer, tunnel, well and underground car park installations.

PATENTS - TRADE MARKS - MODELS

- Registered Community Design n° 342159-0017

OPTIONALS AVAILABLE ON REQUEST

- QES control box for three-phase pumps
- Three-phase dual voltage pumps:
 - 230/400 V or
 - 400/690 V
- Single-phase pumps without float switch
- Other voltages or 60 Hz frequency

GUARANTEE

1 year subject to terms and conditions

➡ For the following versions the built-in thermal overload protector must be connected to the control box in order for the guarantee to be considered valid:

single-phase

– PVXCm 30/50 - HP 3

– PVXCm 30/70 - HP 3


three-phase

– PVXC 15-20-30/50 - HP 1.5-2-3

– PVXC 15-20-30/70 - HP 1.5-2-3

CHARACTERISTIC CURVES AND PERFORMANCE DATA

50 Hz n= 2900 1/min

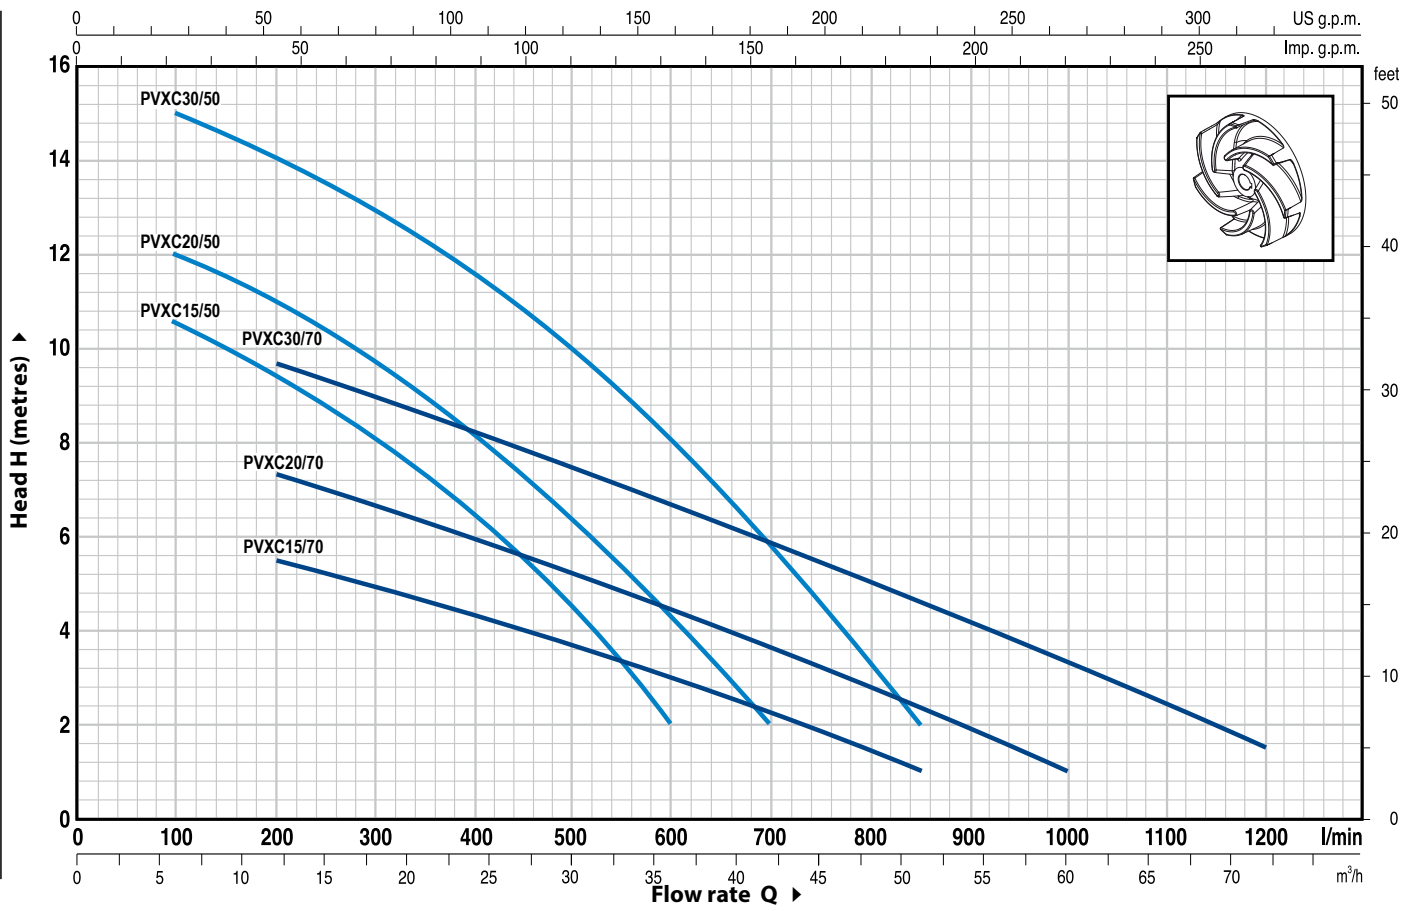

MODEL		POWER		Q	Flow rate																
Single-phase	Three-phase	kW	HP		m³/h	0	6	12	18	21	24	27	30	36	42	48	51	54	60	66	72
PVXCm 15/50	PVXC 15/50	1.1	1.5	H metres	0	100	200	300	350	400	450	500	600	700	800	850	900	1000	1100	1200	
PVXCm 20/50	PVXC 20/50	1.5	2		11.5	10.5	9.5	8.2	7.2	6.5	5.6	4.5	2								
PVXCm 30/50	PVXC 30/50	2.2	3		13	12	11	9.5	9	8	7.2	6.5	4.5	2							
PVXCm 15/70	PVXC 15/70	1.1	1.5		16	15	14	13	12.3	11.5	10.8	10	8	5.9	3.3	2					
PVXCm 20/70	PVXC 20/70	1.5	2		6.5	-	5.5	5	4.7	4.4	4	3.7	3	2.2	1.5	1					
PVXCm 30/70	PVXC 30/70	2.2	3		8.5	-	7.4	6.7	6.3	6	5.6	5.2	4.5	3.6	2.8	2.4	2	1			
					11	-	9.7	9	8.6	8.2	7.8	7.5	6.7	5.8	5	4.6	4.2	3.3	2.5	1.5	

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 App. A.

PVXC "VORTEX"

POS. CONSTRUCTION CHARACTERISTICS

1 PUMP BODY	Cast iron, complete with flanged ports			
2 SUCTION PLATE	Cast iron			
3 BASE PEDESTAL	Cast iron			
4 CONTERFLANGE	Steel, complete with threaded ports in compliance with ISO 228/1			
5 GUIDE TUBE SUPPORTS	Cast iron			
6 IMPELLER	Cast iron VORTEX type			
7 MOTOR CASING	Cast iron			
8 MOTOR CASING PLATE	Cast iron			
9 MOTOR SHAFT	Stainless steel AISI 431			
10 TWO MECHANICAL SEALS SEPARATED BY AN OIL CHAMBER				
Seal	Shaft	Materials		
Model	Diameter	Stationary ring	Rotational ring	Elastomer
STA-20	Ø 20 mm	Ceramic	Graphite	NBR
STA-19	Ø 19 mm	Silicon carbide	Silicon carbide	NBR
11 BEARINGS	6304 ZZ - C3 / 6304 ZZ - C3			

POS. CONSTRUCTION CHARACTERISTICS

12 CAPACITOR

Pump	Capacitance
<i>Single-phase</i>	<i>(230 V or 240 V)</i>
PVXCm 15/50-70	31.5 µF 450 VL
PVXCm 20/50-70	50 µF 450 VL
PVXCm 30/50-70	60 µF 450 VL

13 ELECTRIC MOTOR

PVXCm 15-20: single-phase 230 V - 50 Hz with thermal overload protector built-in to the winding.

⇒ **PVXCm 30:** single-phase 230 V - 50 Hz with motor protector built-in to the winding to be connected to the control box

⇒ **PVXC:** three-phase 400 V - 50 Hz with motor protector built-in to the winding to be connected to the control box

– Insulation: F class

– Protection: IP X8

14 POWER CABLE

10 m long "H07 RN-F" cable

15 CONTROL BOX for PVXCm 15-20

(only for single-phase versions)


Complete with capacitor and manual reset motor protector

16 CONTROL BOX for PVXCm 30


(only for single-phase versions)

QES 300 MONO series

17 FLOAT SWITCH

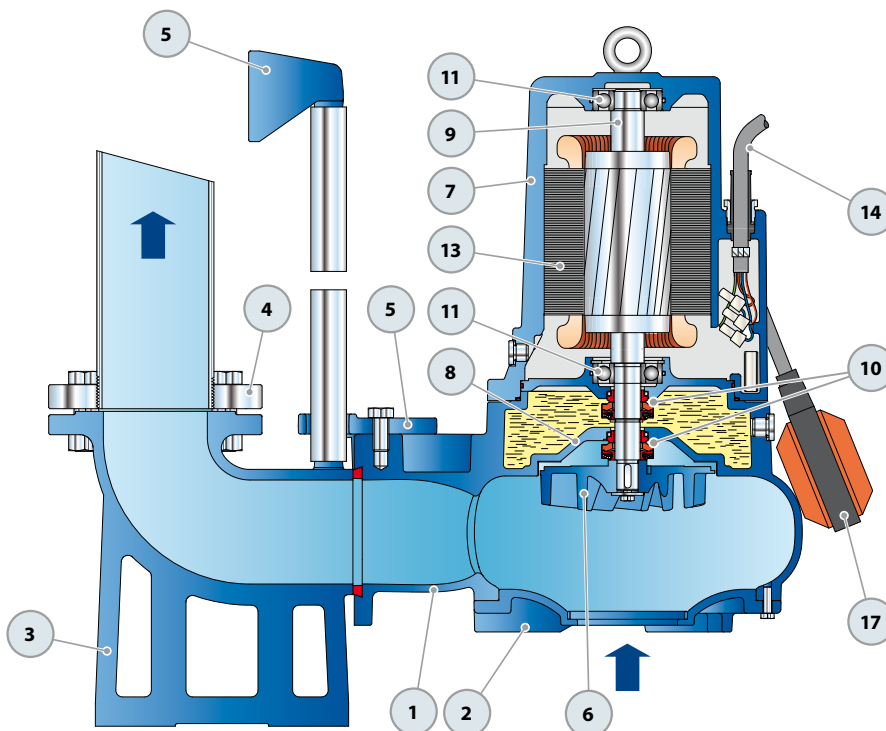


Standard features

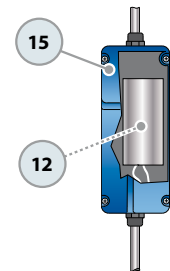


Control box for PVXCm 15-20 (HP 1.5-2.0)
(only for single-phase versions)

Standard features

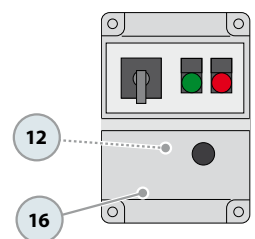


Control box for PVXCm 30 (HP 3.0)
(only for single-phase versions)

DIMENSIONS AND WEIGHT

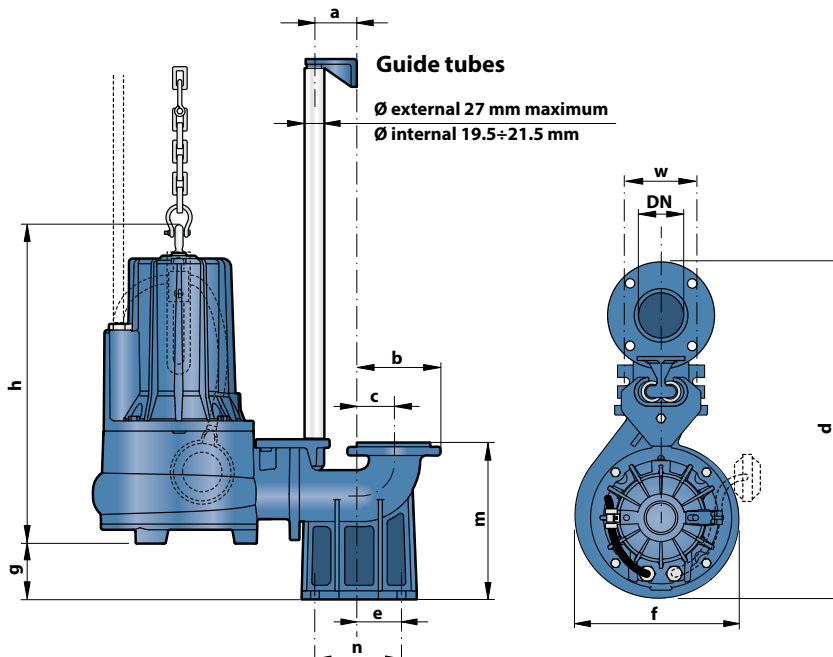

Typical installation

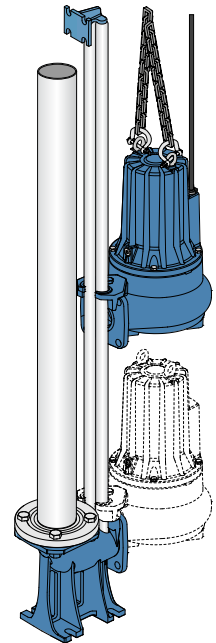

MODEL		PORT DN	solids passage	DIMENSIONS mm										kg*			
Single-phase	Three-phase			a	b	c	d	e	f	g	h	m	n	w	1~	3~	
PVXCm 15/50	PVXC 15/50	2½"	Ø 50 mm	60	116	51	490	62	248	52	442	198	120	72	47.3	46.0	
PVXCm 20/50	PVXC 20/50										457 / 442				48.4	47.1	
PVXCm 30/50	PVXC 30/50										458				52.3	49.2	
PVXCm 15/70	PVXC 15/70	3"	Ø 70 mm		60	150	70	570	85	268	92	458	255	130	112	54.0	52.7
PVXCm 20/70	PVXC 20/70											472 / 458				55.1	53.8
PVXCm 30/70	PVXC 30/70											472 / 458				59.1	55.9

(*weight includes counterflanges)

ABSORPTION

MODEL	VOLTAGE (single-phase)	
	230 V	240 V
Single-phase	230 V	240 V
PVXCm 15/50	8.8 A	8.8 A
PVXCm 20/50	10.2 A	10.2 A
PVXCm 30/50	15.6 A	15.6 A
PVXCm 15/70	8.7 A	8.7 A
PVXCm 20/70	10.0 A	10.0 A
PVXCm 30/70	15.0 A	15.0 A

MODEL	VOLTAGE (three-phase)					
	230 V	400 V	690 V	240 V	415 V	720 V
Three-phase	230 V	400 V	690 V	240 V	415 V	720 V
PVXC 15/50	5.9 A	3.4 A	2.0 A	5.9 A	3.4 A	2.0 A
PVXC 20/50	7.3 A	4.2 A	2.4 A	7.3 A	4.2 A	2.4 A
PVXC 30/50	9.9 A	5.7 A	3.3 A	9.9 A	5.7 A	3.3 A
PVXC 15/70	5.7 A	3.3 A	1.9 A	5.7 A	3.3 A	1.9 A
PVXC 20/70	7.3 A	4.2 A	2.4 A	7.3 A	4.2 A	2.4 A
PVXC 30/70	9.5 A	5.5 A	3.2 A	9.5 A	5.5 A	3.2 A

PALLETIZATION

MODEL		GROUPAGE / CONTAINER			
Single-phase	Three-phase	n° pumps	H (mm)	kg	
				1~	3~
PVXCm 15/50	PVXC 15/50	24	1751	1153	1122
PVXCm 20/50	PVXC 20/50	24	1751	1179	1148
PVXCm 30/50	PVXC 30/50	24	1751	1273	1197
PVXCm 15/70	PVXC 15/70	12	1304	665	650
PVXCm 20/70	PVXC 20/70	12	1304	679	663
PVXCm 30/70	PVXC 30/70	12	1304	727	688

